


The anti-static polyurethane material has been tested in accordance with the requirements of EN 60079-0:2017 clause 7.4.2 and 26.13. This material is dissipative and suitable for ATEX use. We advise seeking independent expert advice on suitability for your application.

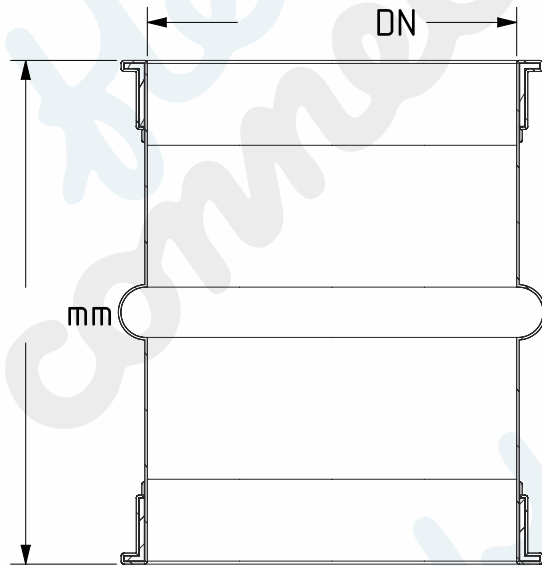

N° of convolutions required

SECTION X-X

Working Conditions	
Media (Product)	
Working Temperature	
Pressure	Positive Negative Amount -
Movement (Type)	Axial mm
	Lateral mm
	Angular °
	Vibration

flexible connections
www.flexibleconnections.co.uk

King Street Trading Estate, Middlewich, Cheshire, CW10 9LF.
Tel: 01606 836024
Email: sales@flexibleconnections.co.uk

Material:
1mm clear FDA &
ATEX rated PU

Title:

DWG N°:

This drawing is confidential and is the property of Flexible Connections LTD.
It must not be disclosed to a third party, copied or lent without written consent of Flexible Connections LTD.
Copyright ©

Drawn By:	Sheet:	Date:	Rev:
J.B.			