



**The anti-static polyurethane material has been tested in accordance with the requirements of EN 60079-0:2017 clause 7.4.2 and 26.13. This material is dissipative and suitable for ATEX use. We advise seeking independent expert advice on suitability for your application.**

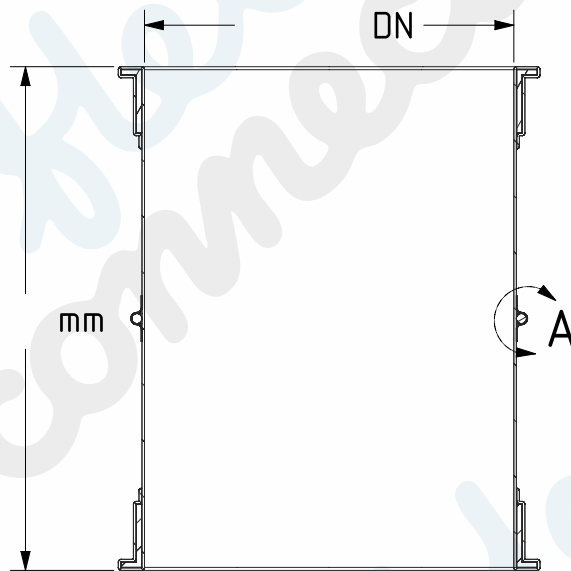

SECTION X-X

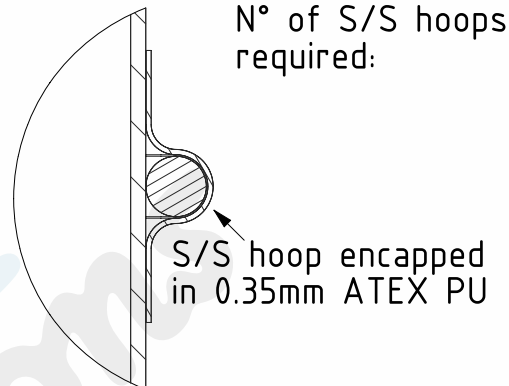

DETAIL A

Working Conditions	
Media (Product)	
Working Temperature	
Pressure	Positive Negative Amount -
Movement (Type)	Axial mm
	Lateral mm
	Angular °
	Vibration

**flexible connections**  
www.flexibleconnections.co.uk

King Street Trading Estate, Middlewich, Cheshire, CW10 9LF.  
Tel: 01606 836024  
Email: sales@flexibleconnections.co.uk

Material:  
1mm clear FDA &  
ATEX rated PU

Title:

DWG N°:

This drawing is confidential and is the property of Flexible Connections LTD.  
It must not be disclosed to a third party, copied or lent without written consent of Flexible Connections LTD.  
Copyright ©

Drawn By:	Sheet:	Date:	Rev:
J.B.			