


SECTION X-X

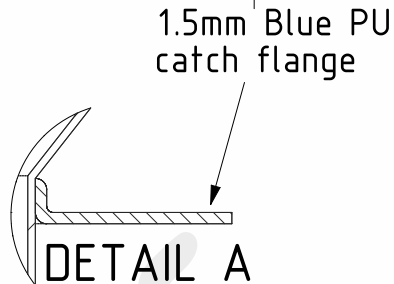

Working Conditions

Media (Product)	
Working Temperature	
Pressure	Positive Negative Amount -
Movement (Type)	Axial mm Lateral mm Angular ° Vibration
Funnel & Chute material (all clear PU's)	1mm standard PU 1.5mm standard PU 1mm ATEX PU *

*
The anti-static polyurethane material has been tested in accordance with the requirements of EN 60079-0:2017 clause 7.4.2 and 26.13. This material is dissipative and suitable for ATEX use. We advise seeking independent expert advice on suitability for your application.



www.flexibleconnections.co.uk

King Street Trading Estate, Middlewich, Cheshire, CW10 9LF.
Tel: 01606 836024
Email: sales@flexibleconnections.co.uk

Material:	Title:	DWG N°:			
<p>This drawing is confidential and is the property of Flexible Connections LTD. It must not be disclosed to a third party, copied or lent without written consent of Flexible Connections LTD. Copyright ©</p>		Drawn By: J.B.	Sheet:	Date:	Rev: